

R-09 Daylight View Case Instruction Manual

Case protects deck, and doubles as viewing hood so R-09 display is visible in daylight.



Daylight View Case for Ediro/Roland R-09 External PA-3SX preamplifier Velcro mounts to outside back of Viewcase. Preamplifier output plug cord is routed into deck's analog LINE input jack as details below suggest.

#1 detail for attaching PA-3SX Preamplifier to back of Viewcase



Pull open belt loop from Velcro patch on back of case.

PA-3SX bottom side Velcro patch mates on back of Viewcase

#2 detail mounting PA-3SX to case



Lift preamp clip while sliding case's belt loop offset as shown and flush with clip's right edge.

Make sure PA-3SX is offset enough so gain switch is operating fully clear of belt loop strap as shown below


#3 detail securing preamp with belt loop



Slide belt loop strap under preamp clip as shown. Note gain switch is clear of strap.

Slide belt loop strap completely under preamp clip as shown above. Check that gain switch is not blocked by case's belt strap.

#4 detail inserting preamp output cord through gap at inside corner and into deck's LINE input jack

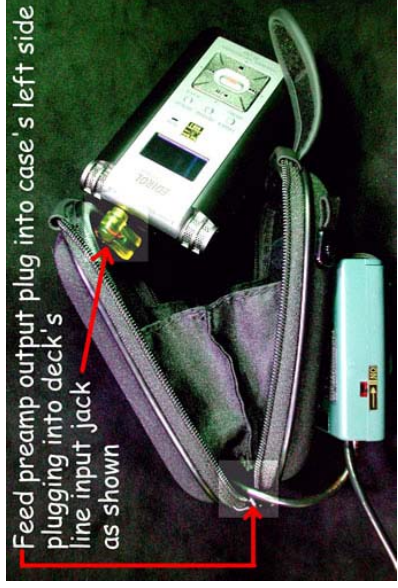

Feed preamp output plug into case's left side plugging into deck's line input jack as shown

#5 detail inserting deck into case while removing excess cord length from inside of case.



Slide deck into case while gently pulling out excess preamp output cord from inside of case

NOTE: PA-3SX output cord may vary so length of excess cord is more or less as shown

#6 detail showing deck operating inside case connected to preamp



View of deck operating while inside view case

#8 detail of securing preamp cord with zipper travel



To close case slide left zipper until preamp output cord is fully secured

NOTE: If preamp output cord is shorter than shown, this ONLY limits left side zipper travel, but suggested securing technique works as shown regardless.

#9 detail showing easy access to flash card, USB port, and battery compartment while still connected to external preamp



Sliding deck out of case just a little gives clear access to flash card, USB port, and battery compartment

#10 detail showing secured deck and preamp ready for travel to remote location recording activity



With both zippers engaged, and Velcro flap secured, R-09 deck & PA-3SX pre is ready for traveling

MiniXLR preamp mic input jack



Sonic Studios™

1311 Sunny Court
Sutherlin, OR 97479-9496 USA
Phone (541) 459-8839
USA Free: 1-877-347-6642
WEB: www.sonicstudios.com
Email: GuySonic@aol.com